




- 1. Two people gently lift and turn sofa upside down.
- 2. Remove the plastic shipping legs and screws from the bottom of the frame.
- 3. Place the metal leg on the corner of the frame (as shown in the diagram below.)
- 4. In the same hole that the shipping lef was taken from, place the bolt (with the lock washer). Make sure the leg is pushed in tightly against the bolt. Tighten the bolt.
- 5. Using a phillips head screwdriver, place the screws into the existing holes-tighten.
- 6. Two people gently lift and turn sofa over on to the legs.



needed for assembly:

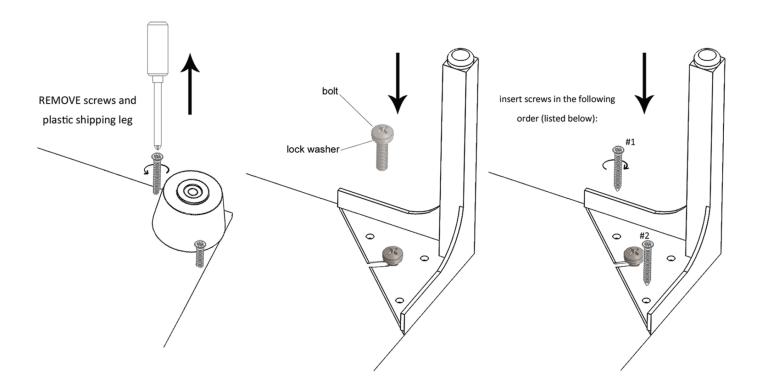